

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets

(11) Veröffentlichungsnummer:

(11) Publication number:

(11) Numéro de publication:

**EP 1 631 956 A0**

Internationale Anmeldung veröffentlicht durch die  
Weltorganisation für geistiges Eigentum unter der Nummer:

**WO 2004/112007** (art. 158 des EPÜ).

International application published by the World  
Intellectual Property Organisation under number:

**WO 2004/112007** (art. 158 of the EPC).

Demande internationale publiée par l'Organisation  
Mondiale de la Propriété sous le numéro:

**WO 2004/112007** (art. 158 de la CBE).



(19) World Intellectual Property  
Organization  
International Bureau




(43) International Publication Date  
23 December 2004 (23.12.2004)

PCT

(10) International Publication Number  
**WO 2004/112007 A1**

- (51) International Patent Classification<sup>7</sup>: **G11B 7/004**
- (21) International Application Number:  
PCT/KR2004/001396
- (22) International Filing Date: 11 June 2004 (11.06.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
60/477,793 12 June 2003 (12.06.2003) US  
60/483,233 30 June 2003 (30.06.2003) US  
10-2003-0062855 8 September 2003 (08.09.2003) KR
- (71) Applicant (for all designated States except US): **SAM-SUNG ELECTRONICS CO., LTD.** [KR/KR]; 416, Maetan-dong, Yeongtong-gu, Suwon-si, Gyeonggi-do 442-742 (KR).
- (72) Inventors: **LEE, Kyung-Geun**; 229-1006 Sibeomdanji Woosung Apt., 16, Seohyun 1-dong, Bundang-gu Seongnam-si, Gyeonggi-do 463-773 (KR). **KO, Jung-Wan**; 315-401 Daewoo Apt., 956-2, Cheongmyung Maeul 3-danji, Yeongtong-dong, Yeongtong-gu Suwon-si, Gyeonggi-do 443-737 (KR).
- (74) Agent: **LEE, Young-Pil**; The Cheonghwa Building, 1571-18, Seocho-dong, Seocho-gu, Seoul 137-874 (KR).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: INFORMATION STORAGE MEDIUM AND METHOD AND APPARATUS FOR RECORDING AND/OR REPRODUCING DATA

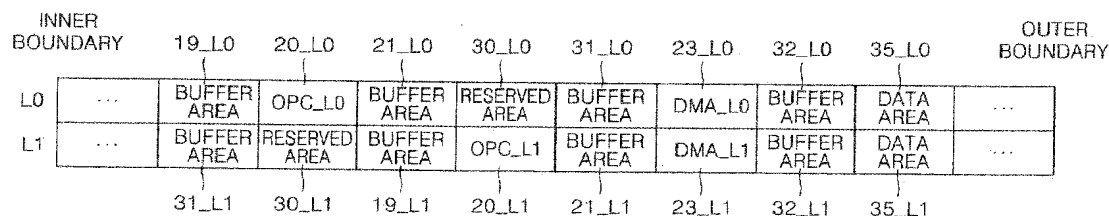

(57) Abstract: An information storage medium capable of controlling optimal recording power without an influence of an optimal power control (OPC) area in a layer upon an OPC area in a different layer. The information storage medium includes at least one information storage layer including an optimal power control area for obtaining an optimal recording condition. OPC areas in adjacent information storage layers are disposed within different radiuses of the information storage medium. Accordingly, even when the information storage medium is made eccentric or has a manufacturing error, a recording property of the information storage medium is prevented from being degraded due to an influence of an OPC area in an information storage layer upon an OPC area in an adjacent information storage layer.

# **Description**

## **INFORMATION STORAGE MEDIUM AND METHOD AND APPARATUS FOR RECORDING AND/OR RE- PRODUCING DATA**

### **Technical Field**

- [1] The present invention relates to recordable information storage media, and more particularly, to an information storage medium designed to control optimum writing power in optimal power control (OPC) areas even when eccentricity occurs among a plurality of information storage layers and a method and apparatus for recording/reproducing data on/from the information storage media.

### **Background Art**

- [2] General information storage media are widely used as information recording media of optical pickup apparatuses for recording/reproducing data in a non-contact way. Optical disks are used as the information storage medium and are classified as compact disks (CDs) or digital versatile disks (DVDs) according to their information storage capacity. Examples of recordable, erasable, and reproducible optical disks are 650MB CD-R, CD-RW, 4.7GB DVD+RW, and the like. Furthermore, HD-DVDs having a recording capacity of 25GB or greater are under development.
- [3] As described above, information storage media have been developed to have a greater recording capacity. The recording capacity of an information storage medium can be increased in two representative ways by: 1) reducing the wavelength of a recording beam emitted from a light source; and 2) increasing the numerical aperture of an objective lens. In addition, there is another method of forming a plurality of information storage layers.
- [4] FIG. 1 schematically shows a dual-layered information storage medium having first and second information storage layers L0 and L1. The first and second information storage layers L0 and L1 include first and second optimal power control (OPC) areas 10L0 and 10L1, respectively, for obtaining an optimal writing power and first and second defect management area (DMAs) 13L0 and 13L1, respectively. The first and second OPC areas 10L0 and 10L1 are disposed to face each other.
- [5] Data is recorded in the first and second OPC areas 10L0 and 10L1 using various levels of writing power to find the optimum writing power. Hence, data may be recorded at a power level higher than the optimum writing power. Table 1 shows variations in the jitter characteristics of each of the first and second information

storage layers L0 and L1 when data is recorded in the OPC areas with different levels of writing power.

[6] Table 1

[7]

		Normal writing power	Normal writing power	Normal writing power	Normal writing power	Writing power about 20% higher than normal writing power	Writing power about 20% higher than normal writing power
L0		Writing	Unwritten	Writing	Written	Writing	Written
L1		Unwritten	Writing	Written	Writing	Written	Writing
Jitter	L0	5.9%		6.0%	5.8%		5.9%→6.4%
	L1		63%	6.2%	63%	6.2% → 63%	
Writing Power	L0	6.4		63	63	7.5	6.4
	L1		6.0	6.0	6.2	6.0	7.2

[8] According to Table 1, if data is recorded with normal writing power, the jitter characteristics of the first or second information storage layer L0 or L1 remain constant. On the other hand, if data is recorded with writing power about 20% higher than the normal writing power, the jitter characteristics of the OPC area of a first or second information storage layer L0 or L1 in which data has already been recorded are degraded. If data is recorded on one of the first and second information storage layers L0 and L1 with writing power more than 20% higher than the normal writing power, it can be expected that the jitter characteristics of the other information storage layer may be further degraded.

- [9] Hence, if the first and second OPC areas 10L0 and 10L1 of the first and second information storage layers L0 and L1 exist within an equal radius as shown in FIG. 1, one of them may not be usable.

## **Disclosure of Invention**

### **Technical Problem**

- [10] The recording status of one of the first and second OPC areas 10L0 and 10L1 may affect the recording characteristics of the other OPC area. For example, as shown in FIG. 2A, if data has been recorded on a part 10L0\_A of the first OPC area 10L0 and no data has been recorded on the residual area 10L0\_B thereof, the recording property of a part of the second OPC area 10L1 which corresponds to the occupied part 10L0\_A of the first OPC area 10L0 is different from that of a part of the second OPC area 10L1 which corresponds to the unoccupied part 10L0\_B of the first OPC area 10L0. In other words, since the transmittance of the laser with respect to the occupied part 10L0\_A of the first OPC area 10L0 is different from the transmittance of a laser with respect to the unoccupied part 10L0\_B thereof, the recording property of the second OPC area 10L1 may be irregular over the area.
- [11] As described above, if the first and second OPC areas are disposed within an equal radius, they may not properly function.
- [12] During the manufacture of an information storage medium, eccentricity may occur. For example, an information storage medium having a single information storage layer may have eccentricity of about 70-80  $\mu$  m(p-p) (where p denotes a peak). To manufacture an information storage medium having first and second information storage layers L0 and L1, the first and second storage layers L0 and L1 are separately manufactured and then attached to each other. When eccentricity occurs during the manufacture of each of the first and second information storage layers L0 and L1, they may be attached to each other such that areas of the first information storage layer L0 are not aligned with those of the second information storage layer L1 as shown in FIG. 2B.
- [13] When the first and second OPC areas 10L0 and 10L1 are not in line, overlapped areas generated due to the out-of-line arrangement may affect each other. For example, if data is recorded on the first OPC area OPC\_L0 using higher power than the normal writing power, the first OPC area OPC\_L0 adversely affects a defect management area (DMA\_L1) of the second information storage layer L1 because the DMA\_L1 contacts a part C of the first OPC area 10L0. Also, a part D of the second OPC area OPC\_L1 may adversely affect a part of the first information storage layer that contacts the part

D, and thus the part may not be used.

### Technical Solution

- [14] An aspect of the present invention provides an information storage medium including an area in which optimum power control (OPC) is performed, thereby preventing an area other than the OPC area from being affected by possible eccentricity.
- [15] Additional aspects and/or advantages of the invention will be set forth in part in the description which follows and, in part, will be obvious from the description, or may be learned by practice of the invention.
- [16] According to an aspect of the present invention, an information storage medium includes at least one information storage layer including an OPC area for obtaining an optical recording condition. OPC areas in adjacent information storage layers are disposed within different radiuses of the information storage medium.
- [17] According to an aspect of the present invention, when the OPC areas in the adjacent information storage layers are apart from each other a small distance in a radial direction of the information storage medium, the distance corresponds to at least a tolerance required upon manufacture of the information storage medium.
- [18] According to an aspect of the present invention, buffer areas each having a size corresponding to at least the tolerance is disposed on both sides of each of the OPC areas.
- [19] According to an aspect of the present invention, a length of the buffer area in the radial direction of the information storage medium is in the range of 5 to 100  $\mu$  m.
- [20] According to an aspect of the present invention, an area for storing reproduction-only data is disposed in an information storage layer such as to face an OPC area of an adjacent information storage layer.
- [21] According to another aspect of the present invention, an information storage medium includes a plurality of information storage layers each including an OPC area for obtaining an optical recording condition. An OPC area in an odd-numbered information storage layer and an OPC area in an adjacent even-numbered information storage layer are disposed within different radiuses of the information storage medium such as not to face each other even when each of the information storage layers has a manufacturing error.
- [22] According to another aspect of the present invention, the information storage medium includes a defect management area and a user data area. A buffer area is included between the defect management area and the user data area.

- [23] According to another aspect of the present invention, an area for storing reproduction-only data may be disposed in an information storage layer such as to face an OPC area of an adjacent information storage layer.
- [24] According to another aspect of the present invention, an information storage medium includes a plurality of information storage layers, each including an OPC area for obtaining an optical recording condition and an area for storing reproduction-only data. An OPC area in an information storage layer is disposed to face a reproduction-only area of an adjacent information storage layer.
- [25] According to another aspect of the present invention, the reproduction-only area may be larger than the OPC area.
- [26] According to another aspect of the present invention, the buffer areas may be disposed at both sides of the OPC area, and each of the buffer areas may have a size obtained in consideration of at least one of the following factors: an error in the determination of a start position of each area; a size of a beam for recording and reproduction; and eccentricity.
- [27] According to another aspect of the present invention, the buffer areas are disposed at both sides of the optimal power control area, and the buffer area located in front of the optimal power control area may have a size corresponding to a pair of disk-related information and disk control data recorded once.

### **Advantageous Effects**

- [28] Even when an information storage medium according to the present invention is made eccentric or has a manufacturing error, a recording property of the information storage medium is prevented from being degraded due to an influence of an OPC area in an information storage layer upon an OPC area in an adjacent information storage layer.

### **Description of Drawings**

- [29] FIG. 1 illustrates a layout of a data area of a conventional dual-layered information storage medium;
- [30] FIGS. 2A and 2B are views illustrating the influence of an OPC area upon an area other than the OPC area in the conventional dual-layered information storage medium of FIG. 1;
- [31] FIG. 3A illustrates a layout of a data area of a dual-layered information storage medium according to an embodiment of the present invention;
- [32] FIG. 3B illustrates a layout of a data area of a single-layered information storage medium according to an embodiment of the present invention;



- [33] FIGS. 4A and 4B illustrate different eccentric states of the dual-layered information storage medium of FIG. 3A;
- [34] FIG. 5A illustrates a layout of a data area of a four-layered information storage medium according to an embodiment of the present invention;
- [35] FIG. 5B illustrates an eccentric state of the four-layered information storage medium of FIG. 5A;
- [36] FIG. 6A illustrates a variation of the dual-layered information storage medium of FIG. 3A;
- [37] FIGS. 6B and 6C illustrate different eccentric states of the dual-layered information storage medium of FIG. 6A;
- [38] FIG. 7A illustrates another variation of the dual-layered information storage medium of FIG. 3A;
- [39] FIG. 7B illustrates a variation of the single-layered information storage medium of FIG. 3B;
- [40] FIG. 8 illustrates a layout of a data area of a dual-layered information storage medium according to another embodiment of the present invention; and
- [41] FIG. 9 illustrates a variation of the dual-layered information storage medium of FIG. 8.
- [42] FIG. 10 is a block diagram of an apparatus for recording/reproducing information to/from an information storage medium according to an embodiment of the present invention; and
- [43] FIG. 11 is a block diagram of a disk drive in which the apparatus of FIG. 10 is implemented.

### Mode for Invention

- [44] Reference will now be made in detail to the embodiments of the present invention, examples of which are illustrated in the accompanying drawings, wherein like reference numerals refer to the like elements throughout. The embodiments are described below to explain the present invention by referring to the figures.
- [45] Referring to FIGS. 3A and 3B, an information storage medium according to an embodiment of the present invention includes at least one information storage layer, each of which includes an optimal power control (OPC) area for obtaining optimal power. The OPC areas are disposed within different radii such that the OPC areas do not to face each other.
- [46] Each of the information storage layers further includes a defect management area (DMA) and a data area in which user data is recorded.

- [47] FIG. 3A illustrates a dual-layered information storage medium which includes first and second information storage layers L0 and L1. The first information storage layer L0 includes a first OPC area 20\_L0, a first DMA 23\_L0, and a first data area 35\_L0, and the second information storage layer L1 includes a second OPC area 20\_L1, a second DMA 23\_L1, and a second data area 35\_L1.
- [48] The first and second OPC areas 20\_L0 and 20\_L1 are located within different radiuses of the information storage medium. First buffer areas 19\_L0 and 21\_L0 are disposed in front of and behind the first OPC area 20\_L0, respectively. Second buffer areas 19\_L1 and 21\_L1 are disposed in front of and behind the second OPC area 20\_L1, respectively.
- [49] Preferably, but not always required, the first and second buffer areas 19\_L0, 21\_L0, 19\_L1, and 21\_L1 have lengths sufficient to cover a tolerance necessary for manufacturing an information storage medium. The tolerance is obtained in consideration of at least one of three factors: an error in the determination of the start position of each area; the size of a beam for recording and reproduction; and eccentricity. The error in the determination of the start position of each area is generated during mastering of the information storage medium and has a size of about 100  $\mu$  m. In an information storage medium having no buffer areas between areas, when data is recorded on or reproduced from a track, an adjacent track is affected by a beam spot because the radius of the beam spot is typically greater than a track pitch. Thus, a buffer area is placed between areas. The size of the buffer area may be determined in consideration of the size of a recording and reproducing beam so as to prevent an influence of the recording and reproducing beam.
- [50] If the information storage medium used is manufactured with an error, the first and second buffer areas 19\_L0, 21\_L0, 19\_L1, and 21\_L1 prevent the first and second OPC areas 20\_L0 and 20\_L1 from affecting other areas.
- [51] The first and second OPC areas 20\_L0 and 20\_L1 are disposed within different radii so that the first and second OPC areas 20\_L0 and 20\_L1 do not face each other. In other words, the first OPC area 20\_L0 faces a reserved area 30\_L1, and the second OPC area 20\_L1 faces a reserved area 30\_L0.
- [52] The first and second OPC areas 20\_L0 and 20\_L1 are manufactured to be spaced apart from each other by a distance corresponding to no less than an allowable eccentricity amount in the radial direction of the information storage medium. In other words, a difference between locations of the first and second OPC areas 20\_L0 and 20\_L1 in the radial direction is no less than the allowable eccentricity amount. The

difference between the locations of the first and second OPC areas 20\_L0 and 20\_L1 denotes a distance between a rear end of the first OPC area 20\_L0 and a front end of the second OPC area 20\_L1.

- [53] Referring to FIG. 3A, the first and second buffer areas 19\_L1 and 21\_L0 preferably are separated by a distance corresponding to no less than an allowable eccentricity amount.
- [54] The dual-layered information storage medium of FIG. 3A further includes at least one pair of a pair of buffer areas 31\_L0 and 31\_L1 and a pair of buffer areas 32\_L0 and 32\_L1 and reserved areas 30\_L0 and 30\_L1. The reserved areas 30\_L0 and 30\_L1 may not be included. The buffer areas are disposed between the reserved area 30\_L0 (or 30\_L1) and the OPC area 20\_L0 (or 20\_L1) and between the DAM 23\_L0 (or 23\_L1) and the data area 35\_L0 (or 35\_L1).
- [55] In the dual-layered information storage medium of FIG. 3A, buffers are disposed on both sides of each of the first and second OPC areas 20\_L0 and 20\_L1 of the corresponding first and second information storage layers L0 and L1. Preferably, this principle is equally applied to a single-layered information storage information of FIG. 3B.
- [56] Referring to FIG. 3B, the single-layered information storage medium includes an OPC area 20 and buffer areas 19 and 21 disposed on both sides of the OPC area 20. The single-layered information storage medium further includes a reserved area 30, a DMA 23, and a data area 35. As illustrated in FIG. 3B, a buffer area 31 is interposed between the reserved area 30 and the DMA 23, and a buffer area 32 is interposed between the DMA 23 and the data area 35.
- [57] To prevent an influence of eccentricity upon the information storage medium shown in FIG. 3A, each of the first and second buffer areas 19\_L0, 21\_L0, 19\_L1, and 21\_L1 has a size corresponding to the allowable eccentricity amount. Accordingly, even when the first and second information storage layers L0 and L1 are made eccentric by the maximum amount in the range of the allowable eccentricity amount, the OPC areas 20\_L0 and 20\_L1 of the first and second information storage layers, respectively, are arranged such that the OPC areas 20\_L0 and 20\_L1 do not face each other.
- [58] In an information storage medium with a 120mm diameter, the allowable eccentricity amount is in the range of about 70-80  $\mu$  m. In an information storage medium with a 60mm diameter, the allowable eccentricity amount is in the range of about 20-30  $\mu$  m. The allowable eccentricity amount varies depending on the size of an

information storage medium. Hence, the first and second buffer areas 19\_L0, 21\_L0, 19\_L1, and 21\_L1 have sizes in the range of 5 to 100  $\mu\text{m}$  so as to cover the allowable eccentricity amounts of all possible kinds of information storage media.

[59] FIGS. 4A and 4B illustrate the first and second information storage layers L0 and L1, which are made eccentric by the maximum amount within the range of the allowable eccentricity amount. FIG. 4A illustrates the first and second information storage layers L0 and L1 made eccentric toward the inner and outer boundaries, respectively, of the information storage medium of FIG. 3A. FIG. 4B illustrates the first and second information storage layers L0 and L1 made eccentric toward the outer and inner boundaries, respectively, of the information storage medium of FIG. 3A.

[60] Referring to FIG. 4A, when the information storage medium of FIG. 3A is in a maximal eccentric state, the first OPC area 20\_L0 faces the buffer area 31\_L1 (see circle A) or the reserved area 30\_L1 instead of the second OPC area 20\_L1. Similarly, the second OPC area 20\_L1 faces the buffer area 31\_L0 (see circle B) or the reserved area 30\_L0 instead of the first OPC area 20\_L0.

[61] Referring to FIG. 4B, when the information storage medium of FIG. 3A is in a maximal eccentric state, the first OPC area 20\_L0 faces the buffer area 19\_L1 (see circle A ?), and the second OPC area 20\_L1 faces the buffer area 21\_L0 (see circle B ?).

[62] As described above, even when the information storage medium of FIG. 3A is in a maximal eccentric state, the first and second OPC areas 20\_L0 and 20\_L1 do not face each other and accordingly do not affect each other during a test for optimal power control. Of course, when the information storage medium as shown in FIG. 3A is not made eccentric, the first and second OPC areas 20\_L0 and 20\_L1 do not affect each other because they are originally disposed not to face each other.

[63] The above-described layout of the dual-layered information storage medium of FIG. 3A can be equally applied to an information storage medium having more than two information storage layers. In other words, in an information storage medium having at least four information storage layers, odd-numbered information storage layers each have the layout of the first information storage layer L0 of FIG. 3A, and even-numbered information storage layers each have the layout of the second information storage layer L1 of FIG. 3A.

[64] FIG. 5A illustrates a four-layered information storage medium having first, second, third, and fourth information storage layers L0, L1, L2, and L3, respectively. The first, second, third, and fourth information storage layers L0, L1, L2, and L3 include OPC

areas 20\_L0, 20\_L1, 20\_L2, and 20\_L3, respectively, DMAs 23\_L0, 23\_L1, 23\_L2, and 23\_L3, respectively, and data areas 35\_L0, 35\_L1, 35\_L2, and 35\_L3, respectively.

- [65] If an information storage medium has a plurality of information storage layers, it has an odd-numbered information storage layer(s) and an even-numbered information storage layer(s). OPC areas 20\_L1 and 20\_L3 included in the odd-numbered information storage layer are referred to as first OPC areas, and OPC areas 20\_L0 and 20\_L2 included in the even-numbered information storage layer are referred to as second OPC areas. The first and second OPC areas in the odd-numbered and even-numbered information storage layers, respectively, are disposed within different radiuses of the information storage medium. A pair of buffer areas 19\_L0 and 21\_L0, a pair of buffer areas 19\_L1 and 21\_L1, a pair of buffer areas 19\_L2 and 21\_L2, and a pair of buffer areas 19\_L3 and 21\_L3 for preventing an influence of the OPC due to eccentricity are disposed on both sides of each of the OPC areas 20\_L0, 20\_L1, 20\_L2, and 20\_L3, respectively.
- [66] Reserved areas 30\_L0, 30\_L1, 30\_L2, and 30\_L3 are further included, and buffer areas 31\_L0, 31\_L1, 31\_L2, and 31\_L3 may be further disposed adjacent to the reserved areas 30\_L0, 30\_L1, 30\_L2, and 30\_L3.
- [67] FIG. 5B illustrates an eccentric state of the four-layered information storage medium of FIG. 5A. Even when an information storage medium having at least three information storage layers is made eccentric, OPC areas in adjacent information storage layers do not face each other as illustrated in circles E and F of FIG. 5B. Hence, an influence of the OPC executed in an OPC area upon another OPC area can be prevented.
- [68] Referring to FIG. 6A, a variation of the dual-layered information storage medium of FIG. 3A includes at least one information storage layer which includes an OPC area for obtaining optimal power, a DMA, and a data area in which user data is recorded. A buffer area is disposed adjacent to the OPC area toward an inner or outer boundary of the information storage medium.
- [69] The dual-layered information storage medium of FIG. 6A includes first and second information storage layers L0 and L1. The first and second OPC areas 20\_L0 and 20\_L1 of the first and second information storage layers L0 and L1 are disposed within different radiuses of the information storage medium such that the first and second OPC areas 20\_L0 and 20\_L1 do not face each other. The first and second OPC areas 20\_L0 and 20\_L1 are disposed to be spaced apart from each other in the radial

direction of the information storage medium by a distance corresponding to at least a maximum eccentricity amount.

[70] The first buffer area 21\_L0 is disposed on a side of the first OPC area 20\_L0 that faces the outer boundary of the information storage medium, and the second buffer area 19\_L1 is disposed on a side of the second OPC area 20\_L1 that faces the inner boundary of the information storage medium. When the information storage medium has no eccentricity, the first and second buffer areas 21\_L0 and 19\_L1 face each other. The first and second buffer areas 21\_L0 and 19\_L1 have a length corresponding to at least the maximum eccentricity amount. The reserved areas 30\_L0 and 30\_L1 are disposed adjacent to the first and second buffer areas 21\_L0 and 19\_L1.

[71] In the information storage medium of FIG. 6A, no buffer areas are included between the DMA 23\_L0 and the data area 35\_L0 and between the DMA 23\_L1 and the data area 35\_L1. Thus, the information storage medium of FIG. 6A provides more area for storing user data than the information storage medium of FIG. 3A.

[72] FIGS. 6B and 6C illustrate different maximum eccentric states of the dual-layered information storage medium of FIG. 6A. When the first and second information storage layers L0 and L1 are made eccentric toward the inner and outer boundaries, respectively, of the information storage medium of FIG. 6A as shown in FIG. 6B, the second OPC area 20\_L1 faces the DMA 23\_L0 in the first information storage layer L0.

[73] When the first and second information storage layers L0 and L1 are made eccentric toward the outer and inner boundaries, respectively, of the information storage medium of FIG. 6A as shown in FIG. 6C, the first OPC area 20\_L0 faces the buffer area 19\_L1 of the second information storage layer L1, and the second OPC area 20\_L1 faces the buffer area 21\_L0 in the first information storage layer L0. In other words, in this case, the first and second OPC areas 20\_L0 and 20\_L1 never face each other even when the information storage medium of FIG. 6A is made eccentric. Thus, the first and second OPC areas 20\_L0 and 20\_L1 do not affect each other. Also, a recording capacity of the information storage medium of FIG. 6A can be increased by reducing the buffer area as much as possible.

[74] FIG. 7A illustrates another embodiment of the dual-layered information storage medium of FIG. 3A. Referring to FIG. 7A, the first and second information storage layers L0 and L1 include first and second OPC areas 40\_L0 and 40\_L1, respectively, DMAs 42\_L0 and 42\_L1, respectively, and data areas 44\_L0 and 44\_L1, respectively. A buffer area 39\_L0 and a first reserved area 41\_L0 are disposed at both sides of the

first OPC area 40\_L0, and a buffer area 41\_L1 and a second reserved area 39\_L1 are disposed at both sides of the second OPC area 40\_L1. The information storage medium of FIG. 7A is the same as that of FIG. 3A in that the first and second OPC areas 40\_L0 and 40\_L1 are disposed within different radiuses. In contrast with FIG. 3A, the first and second reserved areas 41\_L0 and 39\_L1 of FIG. 7A have different sizes than the reserved areas 30\_L and 30\_L1 of FIG. 3A. In FIG. 3A, the buffer area 21\_L0, the reserved area 30\_L0, and the buffer area 31\_L0 are sequentially disposed on a side of the first OPC area 20\_L0 that faces the outer boundary. Similarly, in FIG. 7A, the first reserved area 41\_L0, which has a length corresponding to the reserved area 30\_L0 and the buffer areas 21\_L0 and 31\_L0, is disposed on a side of the first OPC area 40\_L0 that faces the outer boundary.

[75] Also, in FIG. 3A, the buffer area 31\_L1, the reserved area 30\_L1, and the buffer area 21\_L1 are sequentially disposed on a side of the second OPC area 20\_L1 that faces the inner boundary. Similarly, in FIG. 7A, the second reserved area 39\_L1, which has a length corresponding to the reserved area 30\_L1 and the buffer areas 21\_L1 and 31\_L1, is disposed on a side of the second OPC area 40\_L1 that faces the inner boundary.

[76] As described above, the information storage media according to the various embodiments are manufactured so that OPC areas in adjacent information storage layers are located within different radiuses and that each of the OPC areas face a reserved area or a buffer area, thereby preventing a recording property from being degraded due to OPC. Preferably, the reserved area or the buffer area that faces each of the OPC areas is longer than each of the OPC areas.

[77] FIG. 7B illustrates another embodiment of the single-layered information storage medium of FIG. 3B. To have a consistency with the dual-layered information storage medium of FIG. 7A, the single-layered information storage medium of FIG. 7B includes an OPC area 40, a buffer area 39 disposed at one side of the OPC area 40, and a reserved area 41 disposed at the other side of the OPC area 40. A DMA 42, a buffer area 43, and a data area 44 are disposed adjacent to the reserved area 41. In this embodiment, the reserved area 41 is larger than the buffer area 39.

[78] FIG. 8 illustrates a layout of a data area of a dual-layered information storage medium according to another embodiment of the present invention. The dual-layered information storage medium of FIG. 8 includes first and second information storage layers L0 and L1. A second OPC area 47\_L1 for controlling optimal recording power is included in the second information storage layer L1, and a first reproduction-only

area 50\_L0 for storing reproduction-only data is disposed at a location of the first information storage layer L0 that faces the second OPC area 47\_L1. The first reproduction-only area 50\_L0 is larger than the second OPC area 47\_L1. Examples of the reproduction-only data include a disc-related information and disk control data.

[79] The first information storage layer L0 further includes a first protection area 51\_L0 and a first OPC area 47\_L0, between buffer areas 45\_L0 and 48\_L0. The second information storage layer L1 further includes buffer areas 45\_L1 and 48\_L1, a second protection area 51\_L1, and a second reproduction-only area 50\_L1. The buffer areas 45\_L1 and 48\_L1 are disposed at both sides of the second OPC area 47\_L1.

[80] The first and second protection areas 51\_L0 and 51\_L1 are used to obtain the time during which a disk drive accesses each area of a disk. In other words, a protection area is allocated to transit an area to another area in the radial direction of a disk.

[81] Each of the first and second buffer areas 45\_L0, 45\_L1, 48\_L0, and 48\_L1 has a length sufficient to cover a tolerance necessary for manufacturing an information storage medium. The tolerance is obtained in consideration of at least one of three factors: an error in the determination of the start position of each area; the size of a beam for recording and reproduction; and eccentricity. The error in the determination of the start position of each area is generated during mastering and has a size of about 100  $\mu$  m. In an information storage medium having no buffer areas between areas, when data is recorded on or reproduced from a track, an adjacent track is affected by a beam spot because the radius of the beam spot is typically greater than a track pitch. Thus, a buffer area is placed between areas in embodiments of the present invention. The size of the buffer area may be determined in consideration of the size of a recording and reproducing beam so as to prevent an influence of the recording and reproducing beam.

[82] To prevent an influence of the OPC from an adjacent information storage layer, the first OPC area 47\_L0 in the first information storage layer L0 is located to face the second reproduction-only area 50\_L1, and the second OPC area 47\_L1 in the second information storage layer L1 is located to face the first reproduction-only area 50\_L0.

[83] Disk-related information and disk control data, which are examples of reproduction-only data, may be recorded many times in the first and second reproduction-only areas 50\_L0 and 50\_L1 in order to increase the reliability of information. In this case, to face an area corresponding to at least one pair of disk-related information and disk control data, each of the buffer areas 45\_L0 and 45\_L1 is longer than a pair of disk-related information and disk control data for one recording.



- [84] Because the recording of a reproduction-only area is rarely affected by the OPC process, the area is located directly over or below an OPC area in the information storage medium of FIG. 8. Thus, while the reproduction-only area is used to prevent an influence of OPC in an OPC area upon another OPC area, the reproduction only area is also used as a data area. Also, because the first and second OPC areas 47\_L0 and 47\_L1 as arranged never face each other even when eccentricity occurs in the information storage medium of FIG. 8, performing an OPC process in an OPC area does not affect another OPC area which is on a different layer.
- [85] FIG. 9 illustrates a variation of the dual-layered information storage medium of FIG. 8. In the dual-layered information storage medium of FIG. 9, a first information storage layer L0 includes the first reproduction-only area 50\_L0 of FIG. 8, in which disk-related information for reproduction-only and disk control data for reproduction-only are recorded, and a first protection area 51\_L0. A second information storage layer L1 includes an OPC area 47\_L1 that faces the first reproduction-only area 50\_L0. First and second buffer area 45\_L1 and 49\_L1 are disposed at both sides of the OPC area 47\_L1. The information storage medium of FIG. 9 is different from that of FIG. 8 in that the second buffer area 49\_L1 is sized to approximate the size of the second buffer 48\_L1 of FIG. 8 and the second protection area 51\_L1 of FIG. 8. As described above, the buffer area may have various sizes depending on its purpose, use, or the like.
- [86] Even if the information storage media of FIGS. 8 and 9 are made eccentric, or an error is generated in a location of each of the information storage media of FIGS. 8 and 9 where each area starts, the OPC area 47\_L1 always faces the first reproduction-only area 50\_L0. Hence, the reproduction-only area 50\_L0 prevents the OPC in an OPC area of a layer from affecting an area of an adjacent layer and is used as a data area.
- [87] FIG. 10 is a block diagram of a disk drive in which the apparatus of FIG. 7 is implemented. Referring to FIG. 8, the disk drive includes a pickup 10 to serve as the writer/reader 1. The disk 30 is loaded in the pickup 10. The disk drive further includes a PC I/F 21, a DSP 22, an RF AMP 23, a servo 24, and a system controller 25, all of which constitute the controller 2.
- [88] Upon recording, the PC I/F 21 receives a recording command together with data to be recorded, from a host (not shown). The system controller 25 performs initialization necessary for recording. More specifically, the system controller 25 reads out information necessary for initialization, such as, disk-related information stored in a lead-in area of a disk, and prepares for recording based on the read-out information.

The DSP 22 performs ECC encoding on the to-be-recorded data received from the PC I/F 21 by adding data such as parity to the received data, and then modulates the ECC-encoded data in a specified manner. The RF AMP 23 converts the data received from the DSP 22 into an RF signal. The pickup 10 records the RF signal received from the RF AMP 23 to the disk 30. The servo 24 receives a command necessary for servo control from the system controller 25 and servo-controls the pickup 10. If the disk 30 stores no reproducing speed information, the system controller 25 commands the pickup 10 to write the reproducing speed information to a specified area of the disk 30 when recording starts, while recording is being executed, or after recording has been completed.

[89] Upon reproduction, the PC I/F 21 receives a reproduction command from the host (not shown). The system controller 25 performs initialization necessary for reproduction. When the initialization is completed, the system controller 25 reads out reproducing speed information recorded on the disk 30 and performs reproduction at a reproducing speed corresponding to the read-out reproducing speed information. The pickup 10 projects a laser beam onto the disk 30, receives a laser beam reflected by the disk 30, and outputs an optical signal. The RF AMP 23 converts the optical signal received from the pickup 10 into an RF signal, supplies modulated data obtained from the RF signal to the DSP 22, and supplies a servo control signal obtained from the RF signal to the servo 24. The DSP 22 demodulates the modulated data and outputs data obtained through ECC error correction. The servo 24 receives the servo control signal from the RF AMP 23 and a command necessary for servo control from the system controller 25 and servo-controls the pickup 10. The PC I/F 21 sends data received from the DSP 22 to the host (not shown).

[90] A method of recording data to an information storage medium according to the present invention comprising recording data in the optimal power control area for obtaining an optical recording condition; and disposing the optimal power control areas in adjacent ones of the information storage layers within different radiuses of the information storage medium.

## Claims

- [1] An information storage medium, comprising:  
at least two information storage layers each including an optimal power control area obtaining an optical recording condition, wherein the optimal power control areas in adjacent ones of the information storage layers are disposed within different radiuses of the information storage medium.
- [2] The information storage medium of claim 1, wherein when the optimal power control areas in the adjacent information storage layers are spaced apart from each other a small distance in a radial direction of the information storage medium, the distance corresponds to at least a tolerance required upon manufacture of the information storage medium.
- [3] The information storage medium of claim 1, further comprising buffer areas, each having a size corresponding to at least the tolerance, are disposed on both sides of each of the optimal power control areas.
- [4] The information storage medium of claim 3, further comprising a reserved area adjacent to one of the buffer areas disposed around the optimal power control areas.
- [5] The information storage medium of claim 1, further comprising a plurality of data recording areas and a buffer area interposed between adjacent data-recording areas.
- [6] The information storage medium of claim 1, further comprising a defect management area and a user data area, further comprising a buffer area between the defect management area and the user data area.
- [7] The information storage medium of claim 3, wherein a length of each of the buffer areas in the radial direction of the information storage medium is in the range of 5 to 100  $\mu$  m.
- [8] The information storage medium of claim 3, wherein the tolerance is obtained in consideration of at least one factor selected from the group including an error in the determination of a start position of each area, a size of a beam for recording and reproduction, and eccentricity.
- [9] The information storage medium of claim 1, wherein an area storing reproduction-only data is disposed in one of the information storage layers such that the reproduction only data faces the optimal power control area of one of the adjacent information storage layers.

- [10] The information storage medium of claim 9, wherein disk-related information and disk control data are recorded in the area for storing the reproduction-only data.
- [11] An information storage medium, comprising: a plurality of information storage layers each including an optimal power control area obtaining an optimum recording condition, wherein the optimal power control area in an odd-numbered information storage layer and the optimal power control area in an adjacent even-numbered information storage layer are disposed within different radiuses of the information storage medium such that the optimal power control area of the odd numbered information storage layer and the optimal power control area of the even numbered information storage layer do not face each other even when each of the information storage layers has a manufacturing error.
- [12] The information storage medium of claim 11, wherein when the optimal power control areas in the adjacent information storage layers are spaced apart from each other a small distance in a radial direction of the information storage medium, the distance corresponds to at least a tolerance required upon manufacture of the information storage medium.
- [13] The information storage medium of claim 11, further comprising disposing at least one of a buffer area and a reserved area each having a size corresponding to at least the tolerance on both sides of each of the optimal power control areas.
- [14] The information storage medium of claim 11, further comprising a defect management area and a user data area, wherein a buffer area is included between the defect management area and the user data area.
- [15] The information storage medium of claim 14, wherein a length of the buffer area in the radial direction of the information storage medium is in the range of 5 to 100  $\mu$  m.
- [16] The information storage medium of claim 11, wherein one of a buffer area and a reserved area is disposed in an information storage layer to face the optimal power control area of an adjacent information storage layer.
- [17] The information storage medium of claim 11, wherein an area storing reproduction-only data is disposed in an information storage layer to face the optimal power control area of an adjacent information storage layer.
- [18] An information storage medium, comprising:  
a plurality of information storage layers each including an optimal power control area obtaining an optimum recording condition and an area storing reproduction-

only data, wherein the optimal power control area in one of the information storage layers is disposed to face the reproduction-only area of an adjacent one of the information storage layers.

- [19] The information storage medium of claim 18, wherein the reproduction-only area is larger than the optimal power control area.
- [20] The information storage medium of claim 18, further comprising buffer areas are disposed at both sides of the optimal power control area.
- [21] The information storage medium of claim 20, wherein each of the buffer areas has a size corresponding to a tolerance required upon manufacture of the information storage medium.
- [22] The information storage medium of claim 21, wherein the tolerance is obtained in consideration of at least one factor selected from the group including an error in the determination of a start position of each area, a size of a beam for recording and reproduction, and eccentricity.
- [23] The information storage medium of claim 18, wherein disk-related information and disk control data are repeatedly recorded in the reproduction-only area.
- [24] The information storage medium of claim 18, further comprising:  
buffer areas are disposed at both sides of the optimal power control area, and one of the buffer areas that is located in front of the optimal power control area has a size corresponding to a pair of disk-related information and disk control data to be recorded at first.
- [25] A multilayer information storage medium, comprising:  
a first information storage layer comprising a first optimal power control area;  
and  
a second information storage layer adjacent to the first information storage layer comprising a second optimal power control area, wherein the first and second optimal power control areas do not overlap.
- [26] The information storage medium of claim 25, wherein the first and second optimal power control areas do not overlap even when the first information storage layer and the second information storage layer are eccentric with respect to each other.
- [27] The information storage medium of claim 25, further comprising:  
a buffer area disposed on each side of the first optimal power control area and on each side of the second optimal power control area.
- [28] The information storage medium of claim 27, wherein each of the buffer areas

define a separation distance in a radial direction between the first optimal power control area and the second optimal power control area.

- [29] The information storage medium of claim 28, wherein the separation distance is in the range of 5 to 100  $\mu$  m.
- [30] The information storage medium of claim 28, wherein the buffer areas are larger than a tolerance necessary for manufacturing the information storage medium.
- [31] The information storage medium of claim 29, wherein the tolerance is obtained based on at least one of an error in the determination of a start position of each area, a size of a beam for recording and reproduction, and eccentricity.
- [32] The information storage medium of claim 27, further comprising:  
a first reserved area disposed on one side of the first optimal power control area;  
and  
a second reserved area disposed on one side of the second optimal power control area, wherein the first reserved area is aligned with the second optimal power control area and the second reserved area is aligned with the first optimal power control area when there is no eccentricity between the first information storage layer and the second information storage layer.
- [33] The information storage medium of claim 32, wherein the buffer areas and the first and second reserved areas are longer than the first and second optimal power control areas.
- [34] The information storage medium of claim 25, further comprising:  
buffer areas disposed on one side of the first optimal power control area and on one side of the second optimal power control area.
- [35] The information storage medium of claim 34, further comprising:  
a first reserved area disposed on one side of the first optimal power control area;  
and  
a second reserved area disposed on one side of the second optimal power control area, wherein the first reserved area overlaps the second optimal power control area and the second reserved area overlaps the first optimal power control area.
- [36] The information storage medium of claim 35, wherein the buffer areas and the first and second reserved areas are longer than the first and second optimal power control areas.
- [37] The information storage medium of claim 35, wherein the buffer areas are larger than a tolerance necessary for manufacturing the information storage medium.
- [38] The information storage medium of claim 37, wherein the tolerance is obtained

based on at least one of an error in the determination of a start position of each area, a size of a beam for recording and reproduction, and eccentricity.

[39] The information storage medium of claim 35, wherein the first and second reserved areas are twice as large as the buffer area.

[40] The information storage medium of claim 34, further comprising:  
a first reproduction area disposed adjacent to the buffer on the one side of the first optimal power control area; and  
a second reproduction area disposed adjacent to the buffer on the one side of the second optimal power control area, wherein the first reproduction area overlaps the second optimal power control area and the second reproduction area overlaps the first optimal power control area.

[41] The information storage medium of claim 40, wherein the first and second reproduction-only areas are larger than the first and second optimal power control areas, respectively.

[42] The information storage medium of claim 40, wherein the first reproduction area and the second reproduction area comprise disk-related information and disk control data.

[43] The information storage medium of claim 40, further comprising:  
a first protection area disposed between the first reproduction area and the buffer on the one side of the first optimal power control area; and  
a second protection area disposed between the second reproduction area and the buffer of the one side of the second optimal power control area, wherein the first protection area is aligned with the second protection area.

[44] The information storage medium of claim 43, wherein the first and second protection areas form paths for a reproducing and/or recording apparatus to transit between layers in the radial direction of the information storage medium.

[45] A multilayer information storage medium, comprising:  
a plurality of information storage layers numbered consecutively each comprising an optimal power control area, wherein the optimal power control areas of the odd-numbered information storage layers are aligned with respect to each other, and the optimal power control areas of the even-numbered information storage layers are aligned with respect to each other and are out of alignment with the optimal power control areas of the odd-numbered information storage layers.

[46] The information storage medium of claim 45, wherein the optimal power control

areas of the odd-numbered information storage layers and the even-numbered information storage layers do not overlap even when the odd-numbered information storage layers and the even-numbered information storage layers are maximally eccentric with respect to each other.

[47] The information storage medium of claim 45, wherein a recording property of the information storage medium is prevented from being degraded by an influence of an optimal power control process in one of the optimal power control areas of the odd-numbered information storage layers and the optimal power control areas of the even-numbered information storage layers upon the other.

[48] An apparatus for recording data on an information storage medium including a plurality of information storage layers each having an optimal power control area, comprising:  
a writer which writes data to the information storage medium; and  
a controller which controls the writer so that the optimal power control areas in adjacent ones of the information storage layers are disposed within different radiuses of the information storage medium.

[49] An apparatus for recording data on an information storage medium of claim 48, wherein when the optimal power control areas in the adjacent information storage layers are spaced apart from each other a small distance in a radial direction of the information storage medium, the distance corresponds to at least a tolerance required upon manufacture of the information storage medium.

[50] A method of recording data to an information storage medium including a plurality of information storage layers each having an optimal power control area, comprising:  
recording data in the optimal power control area for obtaining an optical recording condition;  
disposing the optimal power control areas in adjacent ones of the information storage layers within different radiuses of the information storage medium.

[51] A method of recording data to an information storage medium of claim 50, wherein when the optimal power control areas in the adjacent information storage layers are spaced apart from each other a small distance in a radial direction of the information storage medium, the distance corresponds to at least a tolerance required upon manufacture of the information storage medium.



1/9

FIG. 1

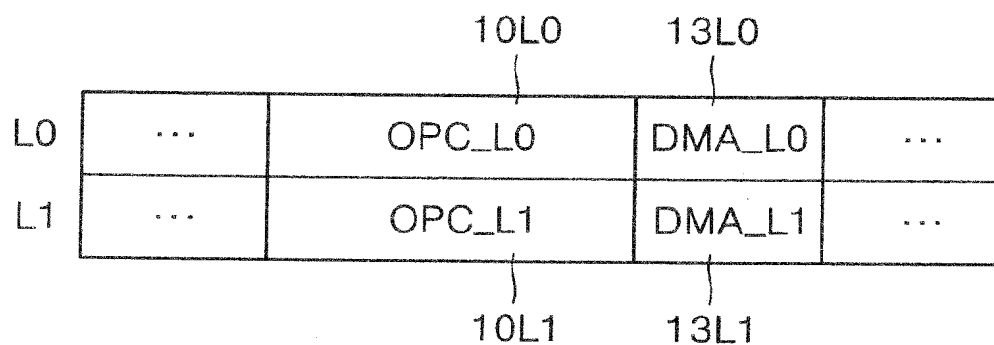


FIG. 2A

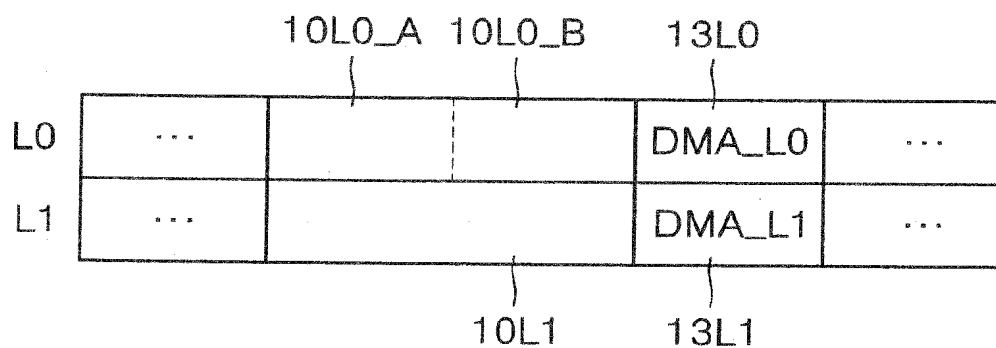


FIG. 2B

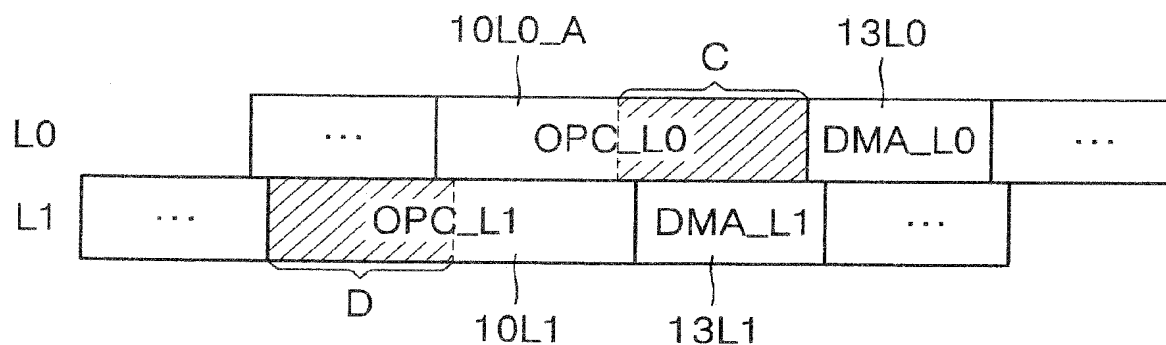


FIG. 3A

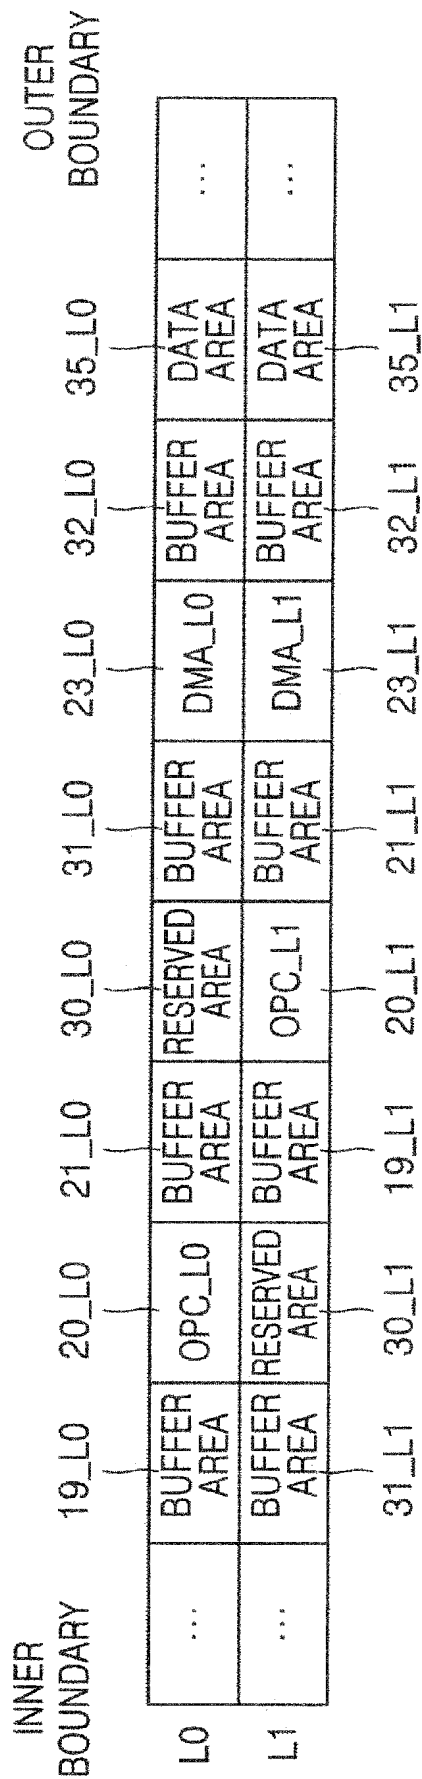


FIG. 3B

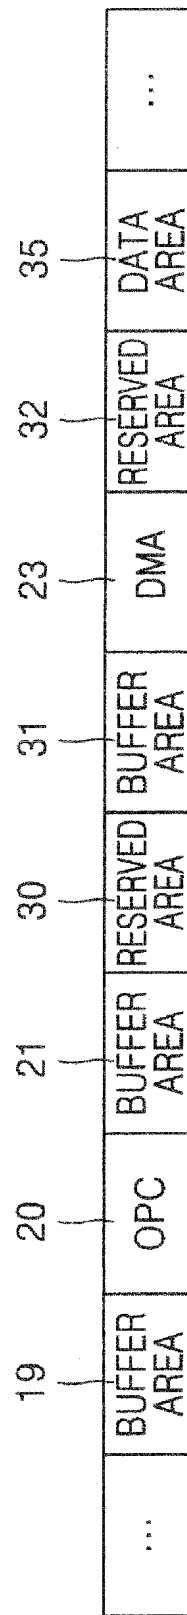


FIG. 4A

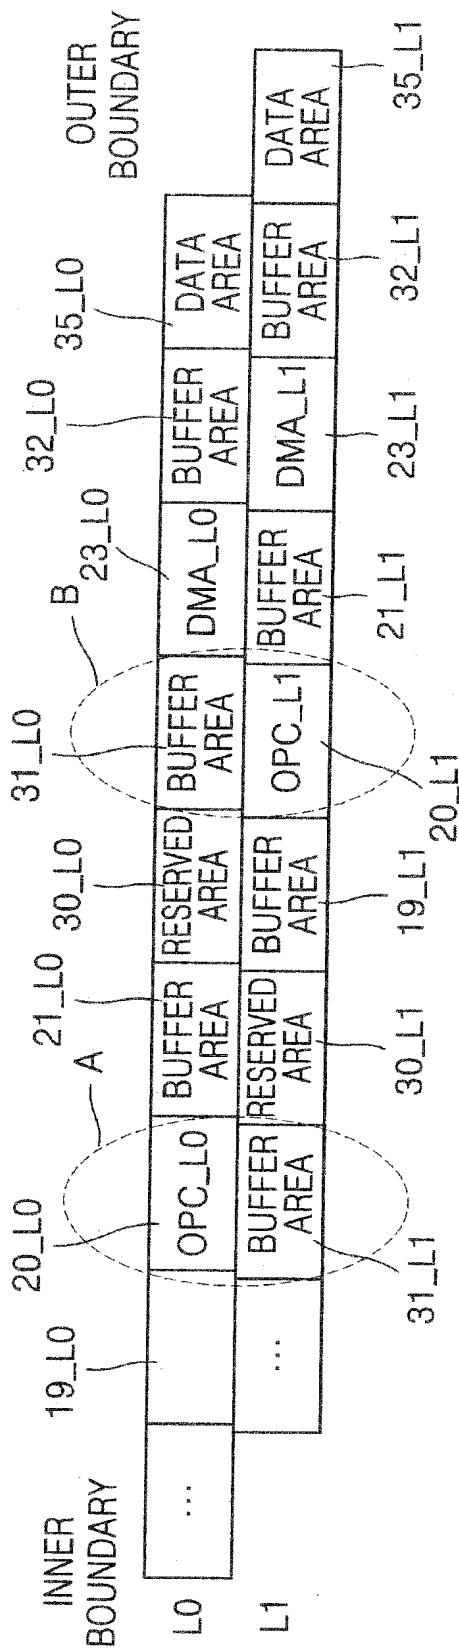


FIG. 4B



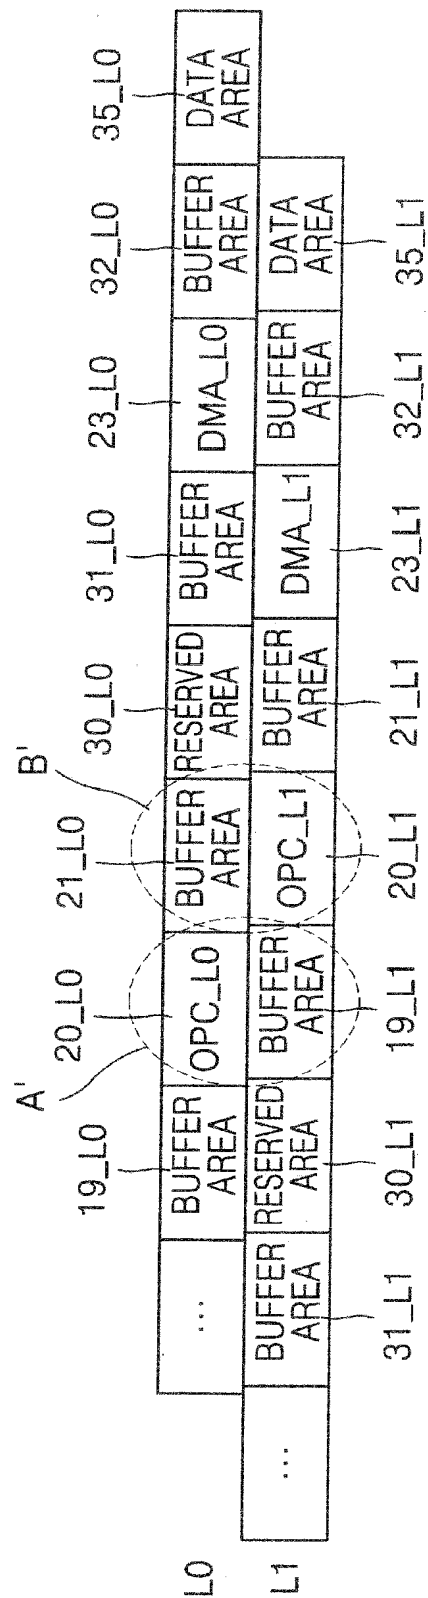


FIG. 5A

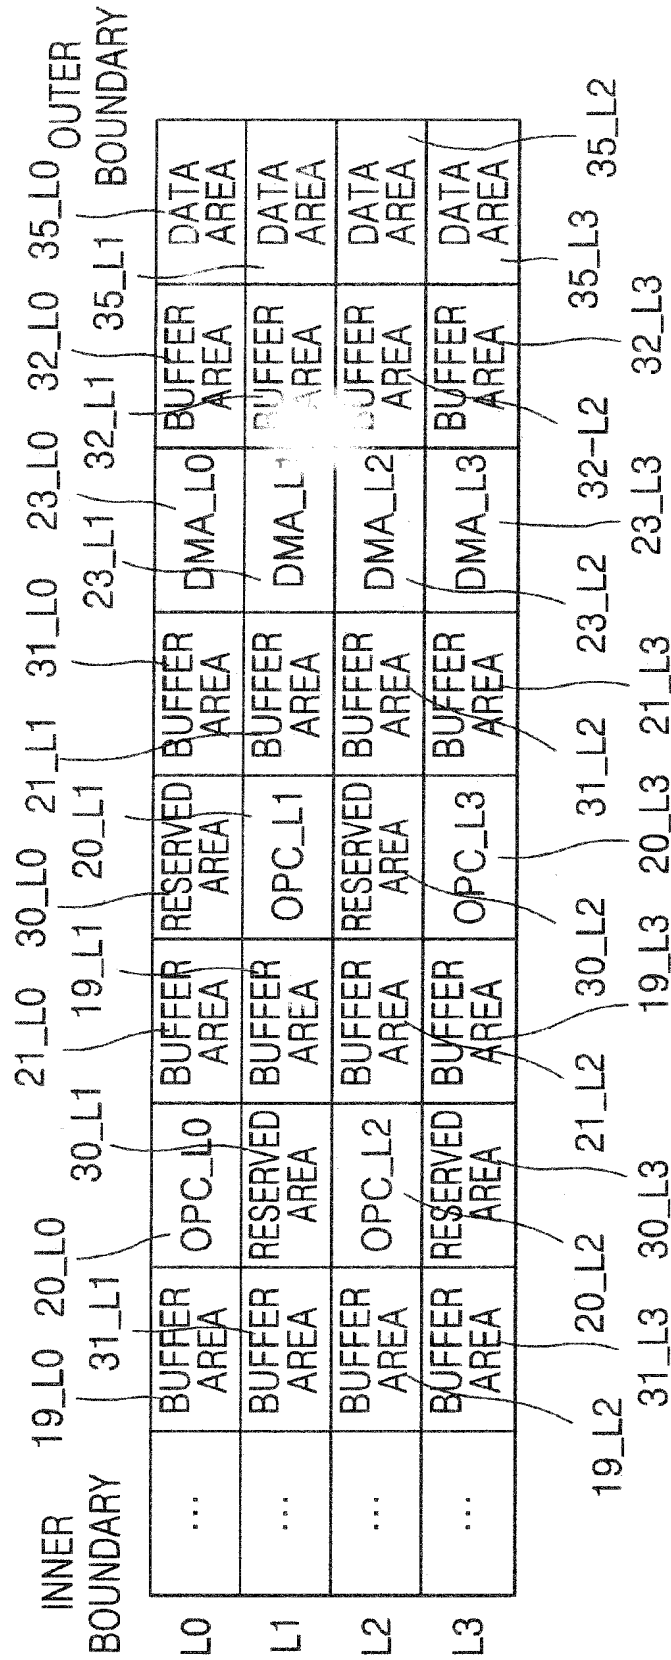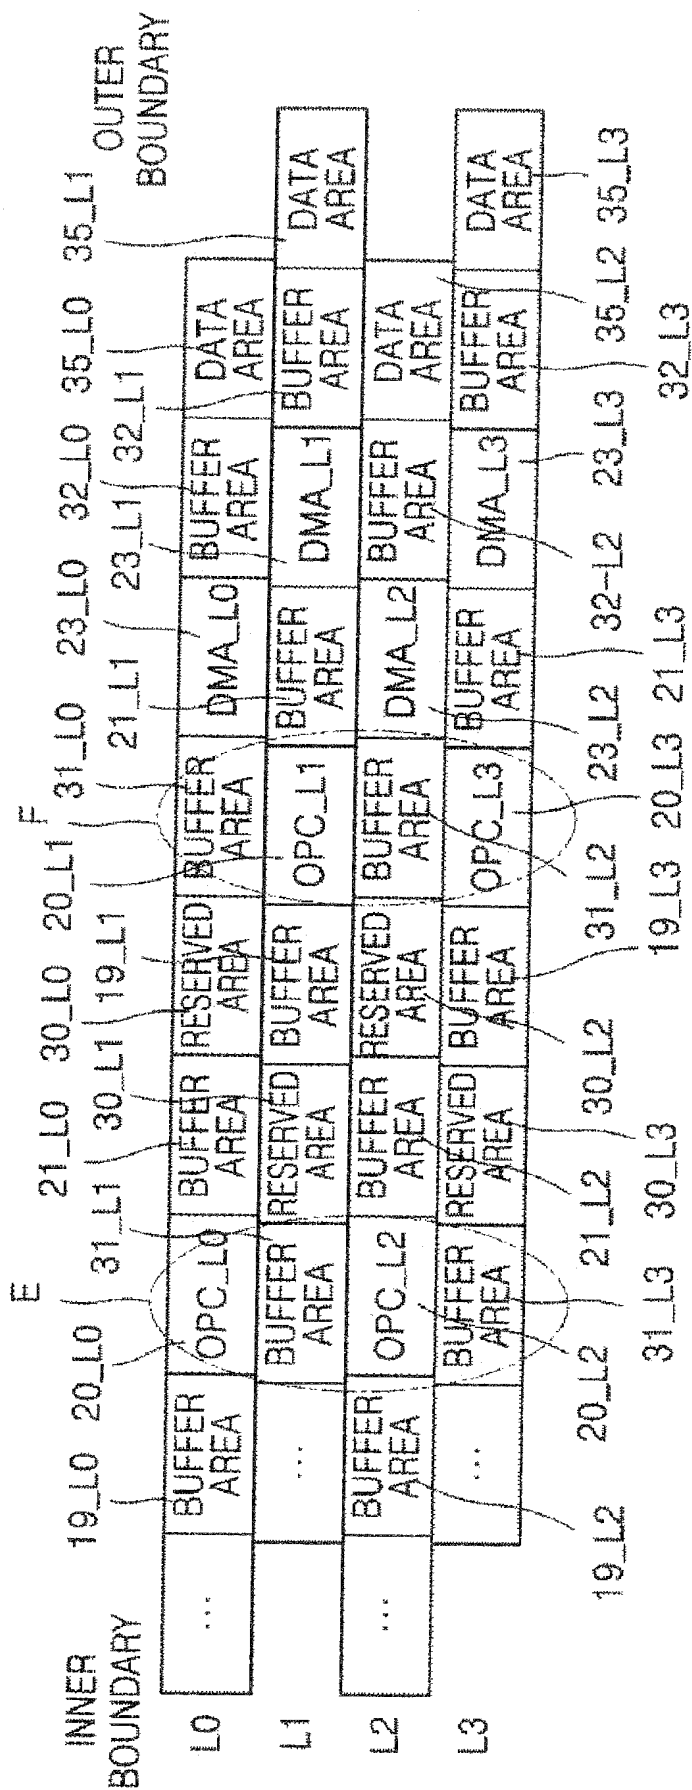

5/9

FIG. 5B



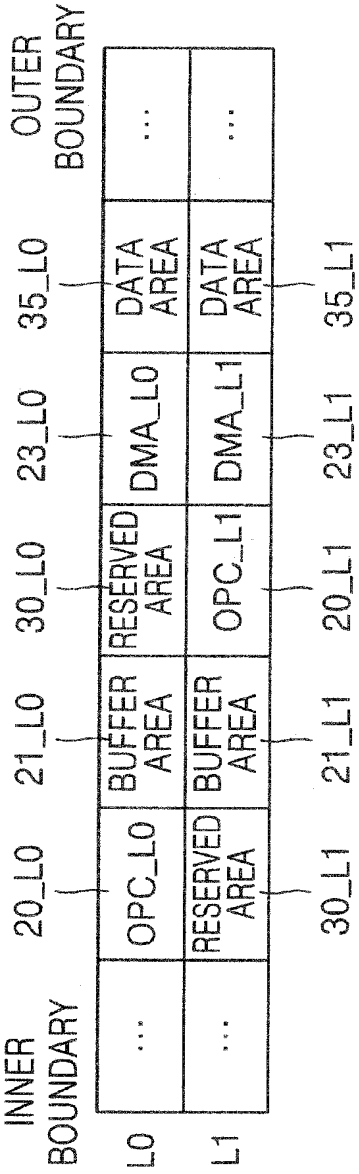


FIG. 6A

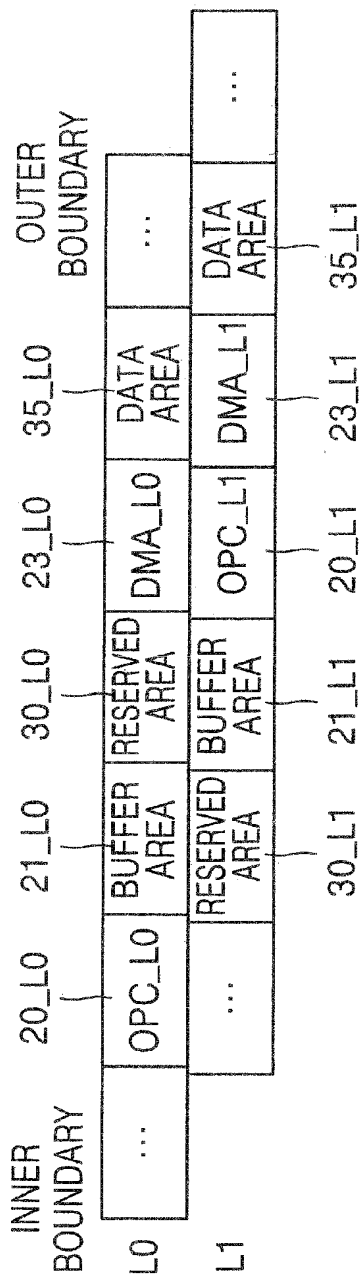


FIG. 6B

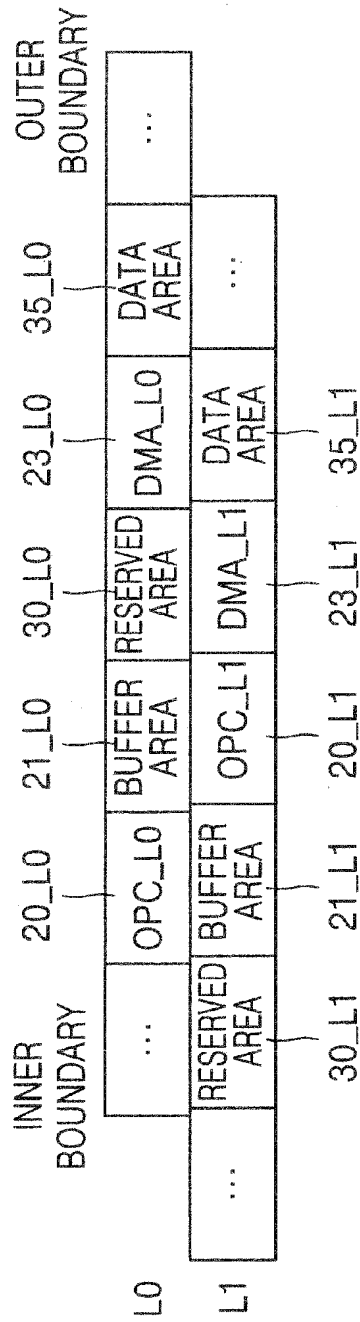


FIG. 6C

FIG. 7A

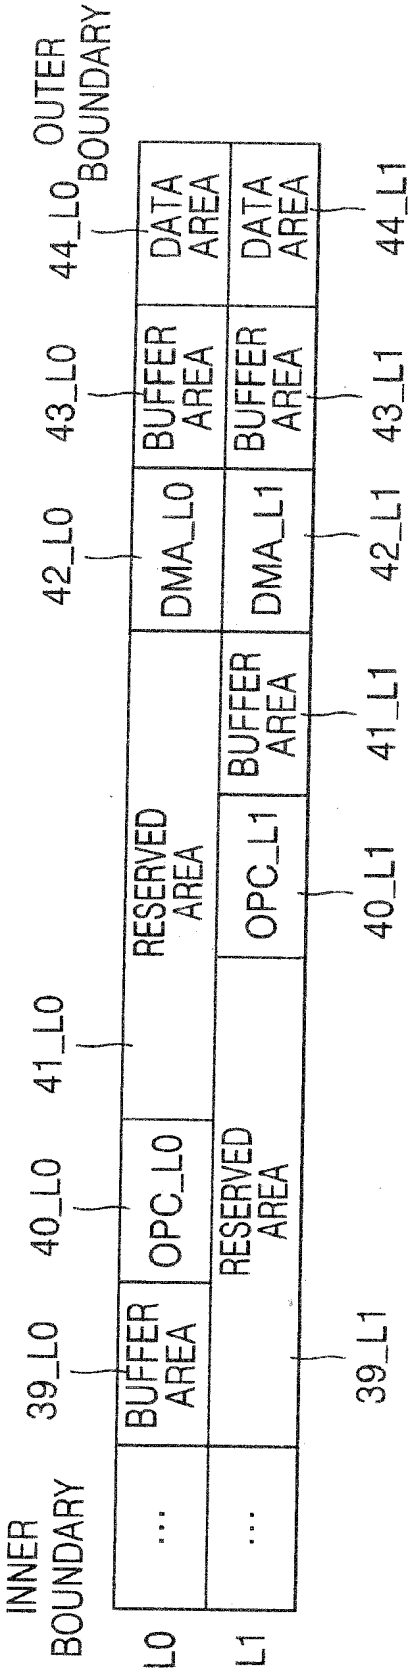


FIG. 7B

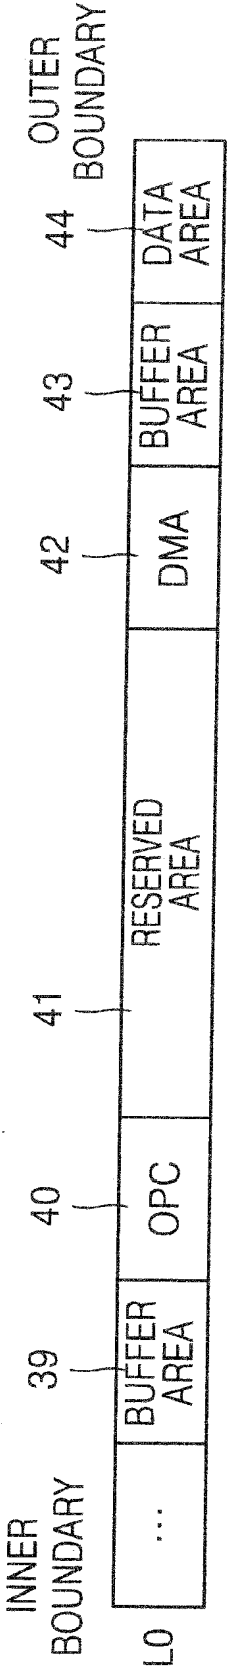


FIG. 8


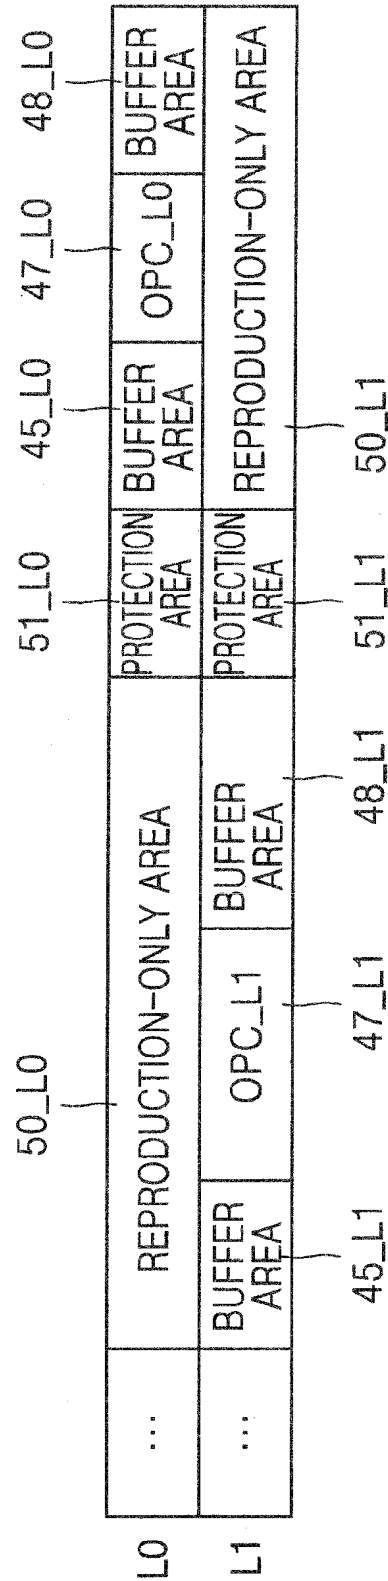


FIG. 9



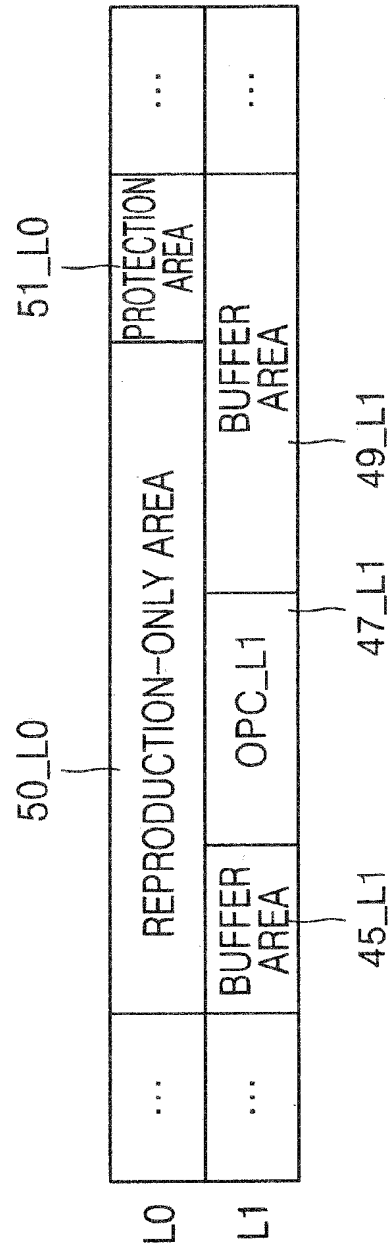

9/9

FIG. 10


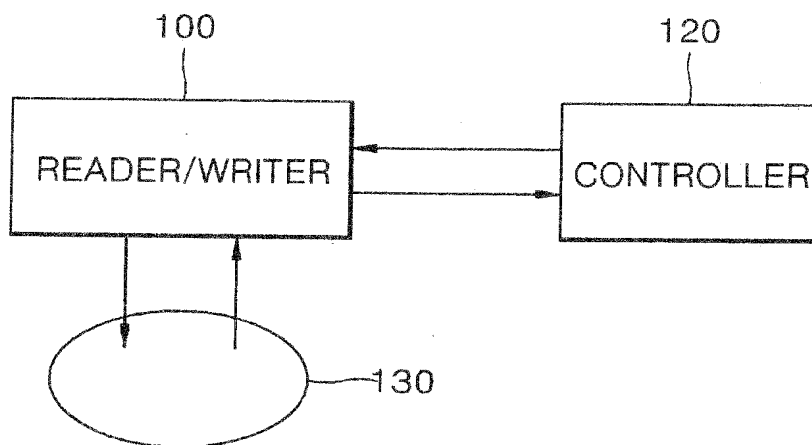


FIG. 11

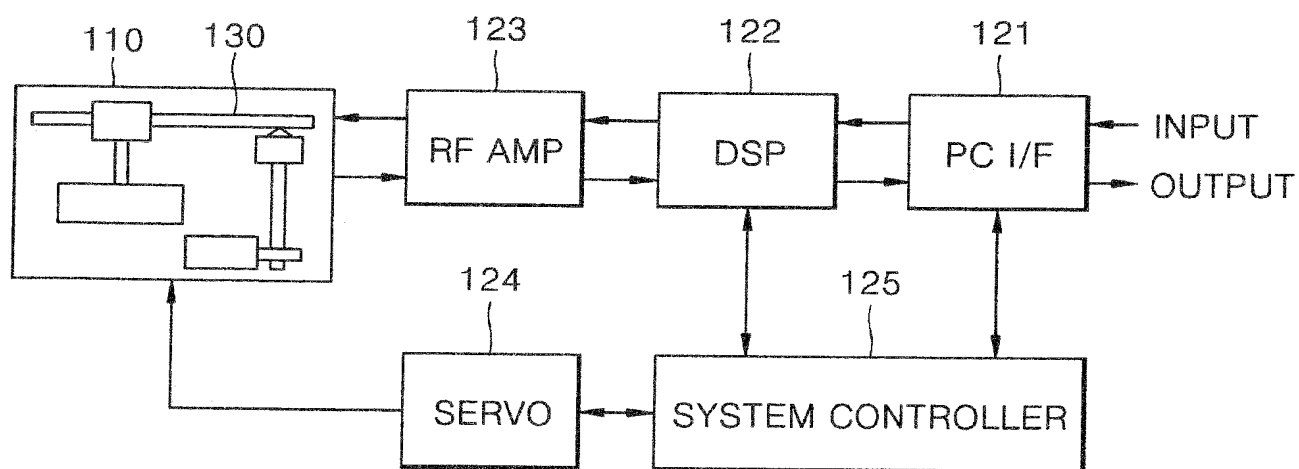

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/KR2004/001396

**A. CLASSIFICATION OF SUBJECT MATTER****IPC7 G11B 7/004**

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G11B 7/00-7/24, G11B 20/00-20/24

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean Patents and applications for inventions since 1975.

Korean Utility models and applications for utility models since 1975.

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI,PAJ"OPTIMAL","POWER","PLURALITY","LAYERS"

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	D1=JP 12-76653 (PIONEER ELECTRONIC CORP.) 14 MARCH 2000 See the whole document.	1
A	D2=JP 12-182292 ( FUJITSU LTD.) 30 JUNE 2000 See the whole document.	1
A	D3=JP 08-329543 (RICOH CO. LTD.) 13 DEC. 1996 See the whole document	1

☐ Further documents are listed in the continuation of Box C.☐ See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

24 SEPTEMBER 2004 (24.09.2004)

Date of mailing of the international search report

**24 SEPTEMBER 2004 (24.09.2004)**

Name and mailing address of the ISA/KR

Korean Intellectual Property Office  
920 Dunsan-dong, Seo-gu, Daejeon 302-701,  
Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

SONG, Jin Suk

Telephone No. 82-42-481-5694

